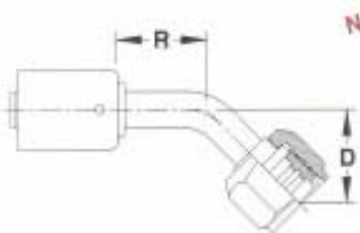


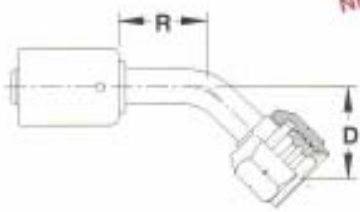


## Aluminum Beadlock Fittings

F = FITTING SIZE    H = HOSE SIZE    D - DROP LENGTH    R - RUN LENGTH    N/A - NOT APPLICABLE

	Part No.	Thread	F	H	D	R
 <p style="text-align: center;"><b>45° FEMALE DUAL O-RING</b> (O-RINGS INCLUDED)</p>	20-BL7112	13/16" - 16	9	8	1.02"	0.94"
	20-BL7113	15/16" - 16	11	10	1.30"	1.25"
	20-BL7114	1 1/16" - 14	12	12	1.40"	1.50"
 <p style="text-align: center;"><b>90° FEMALE DUAL O-RING</b> (O-RINGS INCLUDED)</p>	20-BL7122	13/16" - 16	9	8	1.86"	1.25"
	20-BL7123	15/16" - 16	11	10	1.91"	1.50"
	20-BL7124	1 1/16" - 14	12	12	2.40"	1.75"
 <p style="text-align: center;"><b>STRAIGHT METRIC THREADS FEMALE DUAL O-RING</b> (O-RINGS INCLUDED)</p>	20-BL7302	M24-2.0	M24	8	N/A	2.05"
	20-BL7303	M24-2.0	M24	10	N/A	2.29"
	20-BL7304	M27-2.0	M27	12	N/A	2.46"
 <p style="text-align: center;"><b>45° METRIC THREADS FEMALE DUAL O-RING</b> (O-RINGS INCLUDED)</p>	20-BL7312	M24-2.0	M24	8	1.02"	0.94"
	20-BL7313	M24-2.0	M24	10	1.30"	1.25"
	20-BL7314	M27-2.0	M27	12	1.40"	1.50"