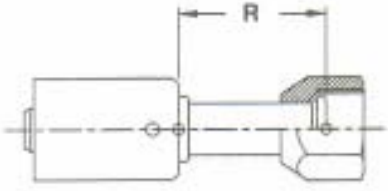
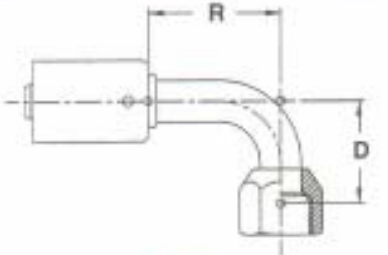
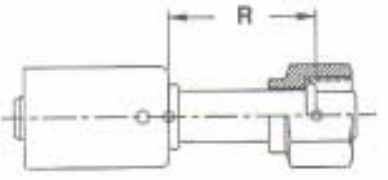
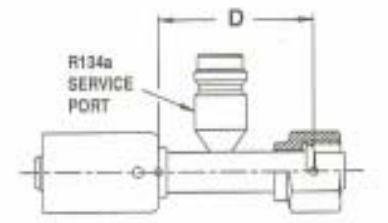


Steel Beadlock Fittings

F = FITTING SIZE H = HOSE SIZE D - DROP LENGTH R - RUN LENGTH N/A - NOT APPLICABLE

	Part No.	Thread	F	H	D	R
 <p>STRAIGHT FEMALE FLARE (SAE 45°)</p>	20-SB1101	5/8"-18	6	6	N/A	1.38"
	20-SB1102	3/4"-16	8	8	N/A	1.44"
	20-SB1103	7/8"-14	10	10	N/A	1.69"
 <p>90° FEMALE FLARE (SAE 45°)</p>	20-SB1121	5/8"-18	6	6	1.12"	1.25"
	20-SB1122	3/4"-16	8	8	1.31"	1.44"
	20-SB1123	7/8"-14	10	10	1.56"	1.63"
 <p>STRAIGHT FEMALE O-RING</p>	20-SB1301	5/8"-18	6	6	N/A	1.38"
	20-SB1302	3/4"-16	8	8	N/A	1.44"
	20-SB1303	7/8"-14	10	10	N/A	1.69"
	20-SB1307	7/8"-14	10	12	N/A	1.88"
 <p>STRAIGHT FEMALE O-RING WITH R134a SERVICE PORT</p>	20-SB1301-3	5/8"-18	6	6	N/A	1.88"
	20-SB1302-3	3/4"-16	8	8	N/A	1.88"
	20-SB1303-3	7/8"-14	10	10	N/A	2.12"