
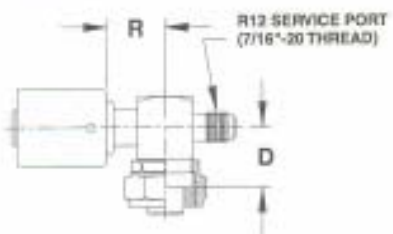
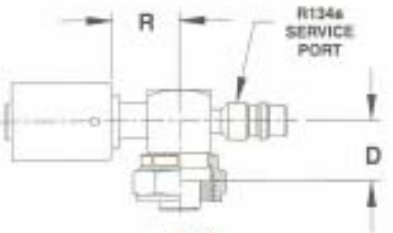
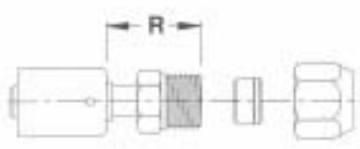


## Steel Beadlock Fittings

F = FITTING SIZE    H = HOSE SIZE    D - DROP LENGTH    R - RUN LENGTH    N/A - NOT APPLICABLE

	Part No.	Thread	F	H	D	R
 <p style="text-align: center;"><b>90° FEMALE ROTALOK WITH R134a SERVICE PORT</b></p>	20-SB2132-3	1"-14	FRL	8	0.78"	0.95"
	20-SB2133-3	1"-14	FRL	10	0.78"	1.01"
 <p style="text-align: center;"><b>90° FEMALE TUBE-O WITH R12 SERVICE PORT</b></p>	20-SB2142-1	1"-14	FTO	8	0.78"	0.95"
	20-SB2143-1	1"-14	FTO	10	0.78"	1.01"
	20-SB2144-1	1"-14	FTO	12	0.78"	1.17"
 <p style="text-align: center;"><b>90° FEMALE TUBE-O WITH R134a SERVICE PORT</b></p>	20-SB2142-3	1"-14	FTO	8	0.78"	0.95"
	20-SB2143-3	1"-14	FTO	10	0.78"	1.01"
	20-SB2144-3	1"-14	FTO	12	0.78"	1.17"
 <p style="text-align: center;"><b>STRAIGHT COMPRESSION FITTING REPAIRS STANDARD TUBING</b></p>	20-SB2901	5/8"-18	TUBE DIA. 3/8"	6	N/A	1.19"
	20-SB2902	3/4"-16	1/2"	8	N/A	1.38"
	20-SB2903	7/8"-14	5/8"	10	N/A	1.50"
	20-SB2904	1 1/16"-14	3/4"	12	N/A	1.75"
	20-SB2905	5/8"-18	3/8"	8	N/A	1.25"
	20-SB2906	3/4"-16	1/2"	10	N/A	1.44"
	20-SB2907	7/8"-14	5/8"	12	N/A	1.63"
	20-SB2908	3/4"-16	1/2"	6	N/A	1.31"
	20-SB2909	7/8"-14	5/8"	8	N/A	1.50"