
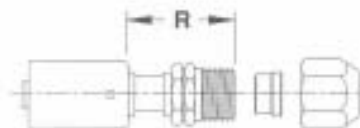

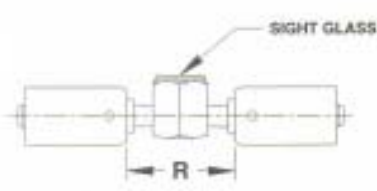


## Steel Beadlock Fittings

F = FITTING SIZE    H = HOSE SIZE    D - DROP LENGTH    R - RUN LENGTH    N/A - NOT APPLICABLE

	Part No.	Thread	F	H	D	R
 <p style="text-align: center;"><b>90° COMPRESSION FITTING REPAIRS STANDARD TUBING</b></p>	20-SB2921	5/8"-18	TUBE DIA. 3/8"	6	0.78"	0.74"
	20-SB2922	3/4"-16	1/2"	8	0.96"	0.87"
	20-SB2923	7/8"-14	5/8"	10	1.08"	0.94"
	20-SB2924	1 1/16"-14	3/4"	12	1.19"	1.16"
	20-SB2925	5/8"-18	3/8"	8	0.78"	0.80"
	20-SB2926	3/4"-16	1/2"	10	0.96"	0.88"
	20-SB2927	7/8"-14	5/8"	12	1.08"	1.06"
	20-SB2928	3/4"-16	1/2"	6	0.96"	0.81"
	20-SB2929	7/8"-14	5/8"	8	1.08"	0.93"
	 <p style="text-align: center;"><b>STRAIGHT COMPRESSION FITTING REPAIRS METRIC TUBING (8.0 = 5/16" TUBE)</b></p>	20-SB3001	5/8"-18	TUBE DIA. 8.0	6	N/A
20-SB3002		3/4"-16	12.0	8	N/A	1.50"
20-SB3003		7/8"-14	14.5	10	N/A	1.62"
 <p style="text-align: center;"><b>STRAIGHT SPLICER WITH R134a SERVICE PORT</b></p>	20-SB6101-3	N/A	6	6	N/A	1.50"
	20-SB6102-3	N/A	8	8	N/A	1.50"
	20-SB6103-3	N/A	10	10	N/A	1.63"
	20-SB6104-3	N/A	12	12	N/A	1.75"
 <p style="text-align: center;"><b>SPLICER WITH IN-LINE SIGHT GLASS</b></p>	20-SB6190	N/A	SG	6	N/A	1.62"