
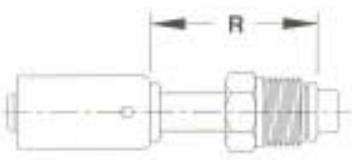

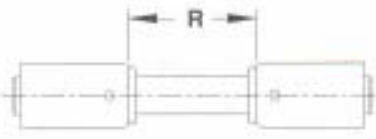


Reduced Beadlock Fittings

F = FITTING SIZE H = HOSE SIZE D - DROP LENGTH R - RUN LENGTH N/A - NOT APPLICABLE

	Part No.	Thread	F	H	D	R
<p>ALUMINUM TUBE</p>  <p>90° FEMALE O-RING WITH R134a SERVICE PORT</p>	<p>20-RB1321-3 20-RB1322-3 20-RB1323-3 20-RB1327-3</p>	<p>5/8" - 18 3/4" - 16 7/8" - 14 7/8" - 14</p>	<p>6 8 10 10</p>	<p>6 8 10 12</p>	<p>1.12" 1.31" 1.50" 1.75"</p>	<p>2.12" 2.12" 2.38" 2.69"</p>
<p>ALUMINUM TUBE</p>  <p>STRAIGHT MALE O-RING</p>	<p>20-RB1401 20-RB1402 20-RB1403 20-RB1407</p>	<p>5/8" - 18 3/4" - 18 7/8" - 18 7/8" - 18</p>	<p>6 8 10 10</p>	<p>6 8 10 12</p>	<p>N/A N/A N/A N/A</p>	<p>1.69" 1.75" 1.88" 2.38"</p>
<p>ALUMINUM TUBE</p>  <p>90° MALE O-RING</p>	<p>20-RB1421 20-RB1422 20-RB1423 20-RB1427</p>	<p>5/8" - 18 3/4" - 18 7/8" - 18 7/8" - 18</p>	<p>6 8 10 10</p>	<p>6 8 10 12</p>	<p>1.63" 1.88" 2.12" 2.25"</p>	<p>1.06" 1.25" 1.50" 1.75"</p>
<p>ALUMINUM TUBE</p>  <p>STRAIGHT SPLICER</p>	<p>20-RB6101 20-RB6102 20-RB6103 20-RB6104 20-RB6105 20-RB6106 20-RB6107</p>	<p>N/A N/A N/A N/A N/A N/A N/A</p>	<p>6 8 10 12 6 8 10</p>	<p>6 8 10 12 8 10 12</p>	<p>N/A N/A N/A N/A N/A N/A N/A</p>	<p>1.50" 1.50" 1.63" 1.75" 1.50" 1.63" 1.75"</p>