
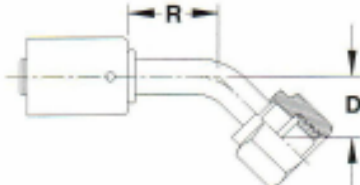
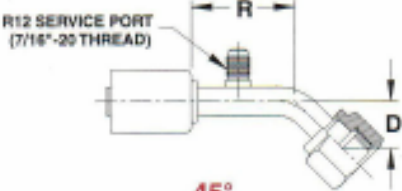
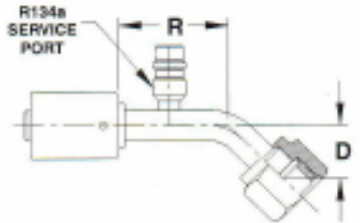


Aluminum Beadlock Fittings

F = FITTING SIZE H = HOSE SIZE D - DROP LENGTH R - RUN LENGTH N/A - NOT APPLICABLE

	Part No.	Thread	F	H	D	R
 <p>STRAIGHT FEMALE O-RING WITH R134a SERVICE PORT</p>	20-BL1301-3	5/8"-18	6	6	N/A	1.88"
	20-BL1302-3	3/4"-16	8	8	N/A	1.88"
	20-BL1303-3	7/8"-14	10	10	N/A	2.12"
	20-BL1307-3	7/8"-14	10	12	N/A	2.25"
 <p>45° FEMALE O-RING</p>	20-BL1311	5/8"-18	6	6	0.56"	0.81"
	20-BL1312	3/4"-16	8	8	0.63"	0.94"
	20-BL1313	7/8"-14	10	10	0.88"	1.25"
	20-BL1314	1 1/16"-14	12	12	0.94"	1.50"
	20-BL1315	5/8"-18	6	8	0.63"	0.94"
	20-BL1316	3/4"-16	8	10	0.88"	1.25"
	20-BL1317	7/8"-14	10	12	0.94"	1.50"
 <p>45° FEMALE O-RING WITH R12 SERVICE PORT</p>	20-BL1311-1	5/8"-18	6	6	0.56"	1.63"
	20-BL1312-1	3/4"-16	8	8	0.63"	1.63"
	20-BL1313-1	7/8"-14	10	10	0.88"	1.75"
 <p>45° FEMALE O-RING WITH R134a SERVICE PORT</p>	20-BL1311-3	5/8"-18	6	6	0.56"	1.63"
	20-BL1312-3	3/4"-16	8	8	0.63"	1.63"
	20-BL1313-3	7/8"-14	10	10	0.88"	1.75"
	20-BL1317-3	7/8"-14	10	12	0.94"	1.88"