
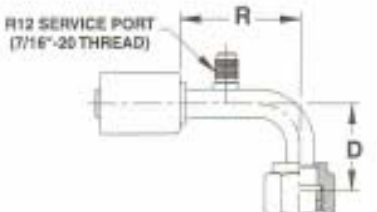
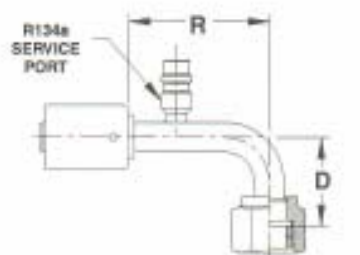



Aluminum Beadlock Fittings

F = FITTING SIZE H = HOSE SIZE D - DROP LENGTH R - RUN LENGTH N/A - NOT APPLICABLE

	Part No.	Thread	F	H	D	R
 <p style="text-align: center;">90° FEMALE O-RING</p>	20-BL1321	5/8"-18	6	6	1.12"	1.06"
	20-BL1322	3/4"-16	8	8	1.31"	1.25"
	20-BL1323	7/8"-14	10	10	1.50"	1.50"
	20-BL1324	1 1/16"-14	12	12	1.75"	1.75"
	20-BL1325	5/8"-18	6	8	1.31"	1.25"
	20-BL1326	3/4"-16	8	10	1.50"	1.50"
	20-BL1327	7/8"-14	10	12	1.75"	1.75"
	20-BL1328	3/4"-16	8	6	1.31"	1.25"
	20-BL1330	1 1/16"-14	12	10	1.75"	1.75"
	 <p style="text-align: center;">90° FEMALE O-RING WITH R12 SERVICE PORT</p>	20-BL1321-1	5/8"-18	6	6	1.12"
20-BL1322-1		3/4"-16	8	8	1.31"	2.12"
20-BL1323-1		7/8"-14	10	10	1.50"	2.38"
20-BL1327-1		7/8"-14	10	12	1.75"	2.69"
 <p style="text-align: center;">90° FEMALE O-RING WITH R134a SERVICE PORT</p>	20-BL1321-3	5/8"-18	6	6	1.12"	2.12"
	20-BL1322-3	3/4"-16	8	8	1.31"	2.12"
	20-BL1323-3	7/8"-14	10	10	1.50"	2.38"
	20-BL1327-3	7/8"-14	10	12	1.75"	2.69"
 <p style="text-align: center;">STRAIGHT MALE O-RING</p>	20-BL1401	5/8"-18	6	6	N/A	1.69"
	20-BL1402	3/4"-18	8	8	N/A	1.75"
	20-BL1403	7/8"-18	10	10	N/A	1.88"
	20-BL1404	1 1/16"-16	12	12	N/A	2.38"
	20-BL1405	5/8"-18	6	8	N/A	1.75"
	20-BL1407	7/8"-18	10	12	N/A	2.38"
	20-BL1408	3/4"-18	8	6	N/A	1.75"