

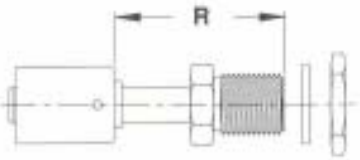



## Aluminum Beadlock Fittings

F = FITTING SIZE    H = HOSE SIZE    D - DROP LENGTH    R - RUN LENGTH    N/A - NOT APPLICABLE

	Part No.	Thread	F	H	D	R
 <p style="text-align: center;"><b>45° MALE O-RING</b></p>	20-BL1411	5/8"-18	6	6	0.88"	0.81"
	20-BL1412	3/4"-18	8	8	1.00"	0.94"
	20-BL1413	7/8"-18	10	10	1.06"	1.25"
	20-BL1414	1 1/16"-16	12	12	1.19"	1.50"
	20-BL1415	5/8"-18	6	8	1.00"	0.94"
	20-BL1418	3/4"-18	8	6	1.00"	0.94"
 <p style="text-align: center;"><b>90° MALE O-RING</b></p>	20-BL1421	5/8"-18	6	6	1.63"	1.06"
	20-BL1422	3/4"-18	8	8	1.88"	1.25"
	20-BL1423	7/8"-18	10	10	2.12"	1.50"
	20-BL1424	1 1/16"-16	12	12	2.25"	1.75"
	20-BL1425	5/8"-18	6	8	1.88"	1.25"
	20-BL1427	7/8"-18	10	12	2.25"	1.75"
	20-BL1428	3/4"-18	8	6	1.88"	1.25"
	 <p style="text-align: center;"><b>STRAIGHT BULKHEAD MALE INSERT O-RING</b></p>	20-BL1701	5/8"-18	6	6	N/A
20-BL1702		3/4"-16	8	8	N/A	2.75"
20-BL1703		7/8"-14	10	10	N/A	2.94"
 <p style="text-align: center;"><b>90° BULKHEAD MALE INSERT O-RING</b></p>	20-BL1721	5/8"-18	6	6	2.12"	1.63"
	20-BL1722	3/4"-16	8	8	2.44"	1.75"
	20-BL1723	7/8"-14	10	10	2.50"	2.00"