


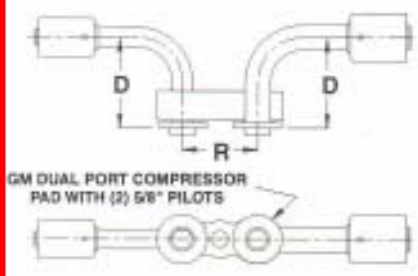


Aluminum Beadlock Fittings

F = FITTING SIZE H = HOSE SIZE D - DROP LENGTH R - RUN LENGTH N/A - NOT APPLICABLE

	Part No.	Thread	F	H	D	R
 <p>STRAIGHT MALE INSERT O-RING</p>	20-BL1801 20-BL1802 20-BL1803 20-BL1804	5/8"-18 3/4"-16 7/8"-14 1 1/16"-14	6 8 10 12	6 8 10 12	N/A N/A N/A N/A	1.44" 1.63" 2.12" 2.38"
 <p>45° MALE INSERT O-RING</p>	20-BL1811 20-BL1812 20-BL1813	5/8"-18 3/4"-16 7/8"-14	6 8 10	6 8 10	0.75" 1.00" 1.25"	0.81" 0.94" 1.25"
 <p>90° MALE INSERT O-RING</p>	20-BL1821 20-BL1822 20-BL1823	5/8"-18 3/4"-16 7/8"-14	6 8 10	6 8 10	1.50" 1.75" 2.00"	1.06" 1.25" 1.50"
 <p>90° GM DUAL PORT COMPRESSOR UNIVERSAL SWIVEL</p>	20-BL1900	N/A	GM	8 12	2.31"	1.88"