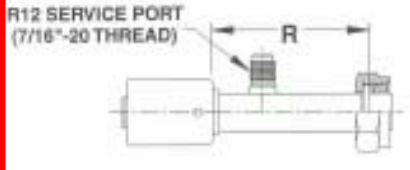
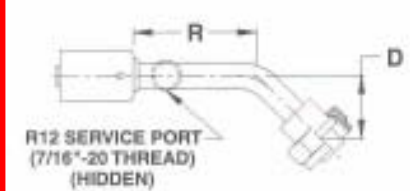
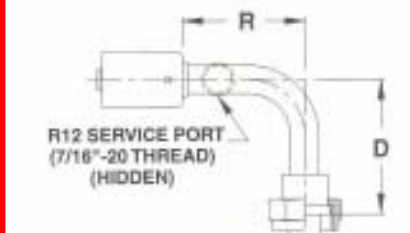
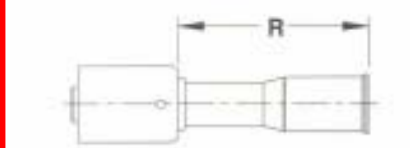


## Aluminum Beadlock Fittings

F = FITTING SIZE    H = HOSE SIZE    D - DROP LENGTH    R - RUN LENGTH    N/A - NOT APPLICABLE

	Part No.	Thread	F	H	D	R
 <p>R12 SERVICE PORT (7/16"-20 THREAD)</p> <p style="text-align: center;"><b>STRAIGHT FEMALE TUBE-O WITH R12 SERVICE PORT</b></p>	<p>20-BL2102-1 20-BL2103-1</p>	<p>1"-14 1"-14</p>	<p>FTO FTO</p>	<p>8 10</p>	<p>N/A N/A</p>	<p>2.56" 2.63"</p>
 <p>R12 SERVICE PORT (7/16"-20 THREAD) (HIDDEN)</p> <p style="text-align: center;"><b>45° FEMALE TUBE-O WITH R12 SERVICE PORT</b></p>	<p>20-BL2112-1 20-BL2113-1</p>	<p>1"-14 1"-14</p>	<p>FTO FTO</p>	<p>8 10</p>	<p>1.12" 1.25"</p>	<p>2.00" 2.12"</p>
 <p>R12 SERVICE PORT (7/16"-20 THREAD) (HIDDEN)</p> <p style="text-align: center;"><b>90° FEMALE TUBE-O WITH R12 SERVICE PORT</b></p>	<p>20-BL2122-1 20-BL2123-1</p>	<p>1"-14 1"-14</p>	<p>FTO FTO</p>	<p>8 10</p>	<p>2.31" 2.38"</p>	<p>2.31" 2.38"</p>
 <p style="text-align: center;"><b>STRAIGHT FORD FEMALE SPRINGLOCK</b></p>	<p>20-BL4101 20-BL4102 20-BL4103 20-BL4104 20-BL4107 20-BL4108</p>	<p>N/A N/A N/A N/A N/A N/A</p>	<p>6 8 10 12 10 8</p>	<p>6 8 10 12 12 6</p>	<p>N/A N/A N/A N/A N/A N/A</p>	<p>2.31" 2.38" 2.63" 2.75" 2.63" 2.38"</p>